

For inquiries or orders, please complete the following questionnaire

Desired switching functions
(max./min. indication, pump or
valve ON/OFF, filling or emptying,
run-dry or overflow protection):

Tank dimensions and installation
conditions
(attach sketch if necessary):


Type of liquid: _____

Specific gravity: _____

Viscosity: _____

Temperature: _____

Working pressure: _____

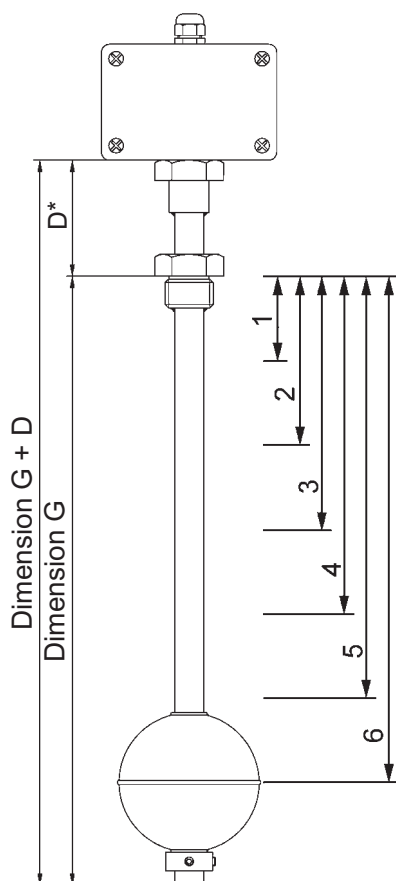

Desired version:

TSR/ _____

Desired probe tube length (dimension G):

Please mark desired floats and collars on the probe tube!
* = dimension D: 20 mm or, but only for the Ex ia versions,
other value to be specified.

Desired options:

	Contact type: make = NO break = NC changeover = OC	Distance from the sealing surface of the screw-in nipple, mm	Switching function (e.g. high alarm, pump ON, pump OFF etc.)	If float has a working direction: rising = ↑ falling = ↓
1				
2				
3				
4				
5				
6				

**Immersion probes will be manufactured according to customer's specifications.
It is therefore not possible to return these special designs.**